



Serie Girolamp



GIROLAMP S

Luz rotativa halógena
o de filamento

CÓDIGO	TENSIÓN V	FRECUENCIA Hz	CORRIENTE mA	POTENCIA LAMP. W	ROTACIÓN ±5 r.p.m.
5507130 ☐	12 c.c.	-	4600	55	180
5507230 ☐	24 c.c.	-	2920	70	180
5509220 ☐	24 c.a.	50 / 60	1875	45	180
5509770 ☐	125 c.a.	50 / 60	350	40	180
5509400 ☐	230 c.a.	50 / 60	20	42	180

▲ Apliquen el código de color: 0 1 2 3 4 5

Normativa ECE R65

Dimensiones: (Altura x Diámetro): 200 mm x 150 mm
 Construcción: Base: ABS negro
 Tulipa: Policarbonato translúcido



Versión
230 c.a.



c.a.


Versión c.c.
y 230 c.a.






Diagramas técnicos


MAXILAMP 150 FIXO
MAXILAMP 150 FIXO LED HL
MAXILAMP 150 Larga Vida
MAXILAMP 150 N
MAXILAMP 150 N LED HL
MAXILAMP 150 FHL Multitensión
LAMP 150 FH Strobe
GIROLAMP S

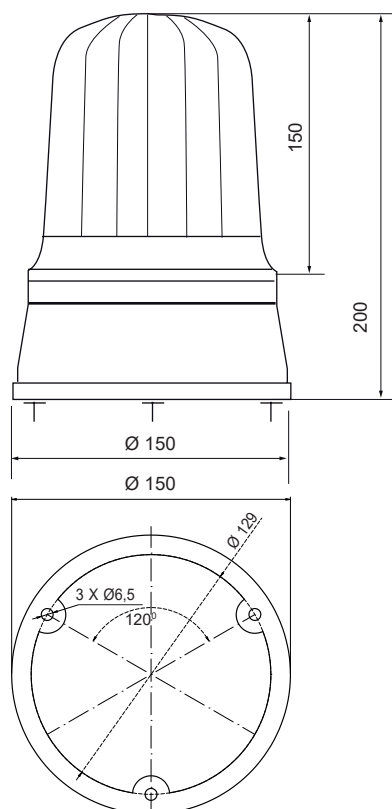


FCSM165227

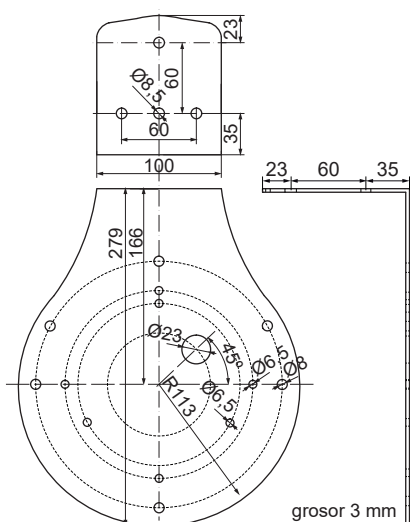


JP150

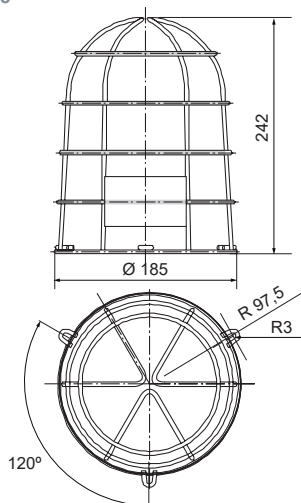


SM150

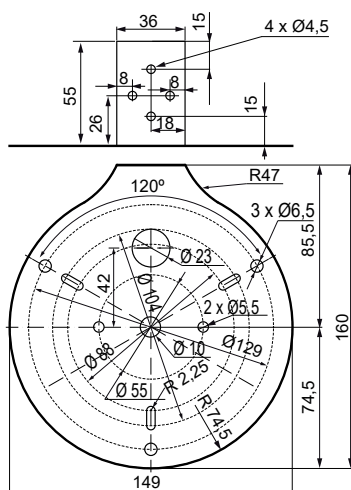


5200




FCGAR6



5934

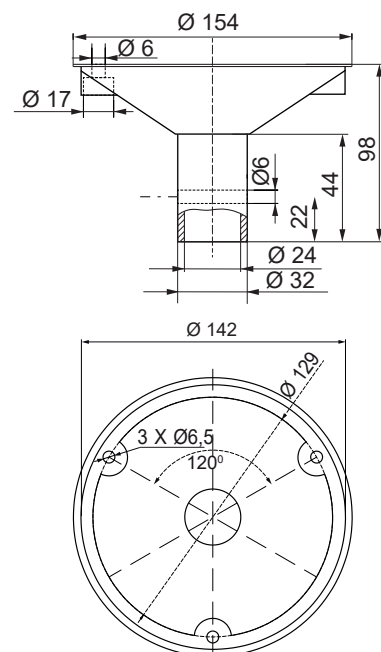

FCSCMM

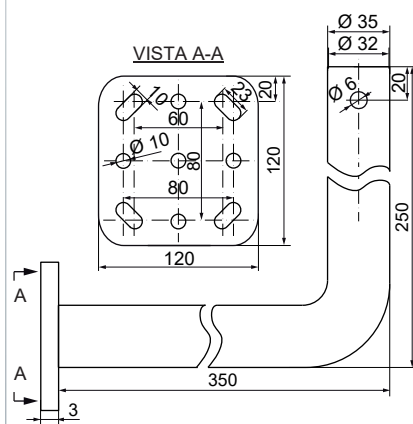

FCMAST1

