


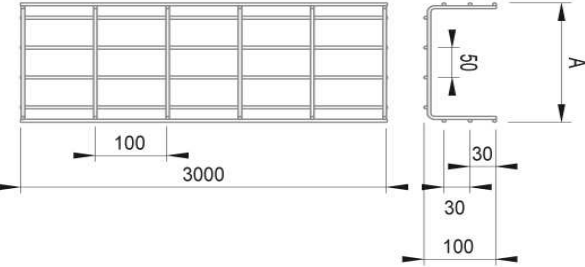

# PRODUCT SPECIFICATION

## AISCAN BMPR - 100

TYPE	MATERIAL	COATING	A	B	ALLOWABLE WORKING LOAD (N/m)	PACKING (meters)	PLAIN	
								
AISCAN-BMPR-1020	METALLIC	ELECTRO ZINC PASSIVATED	60	60	1017	24		
AISCAN-BMPR-1030	"	"	100	60	794	12		
AISCAN-BMPR-1040	"	"	150	60	788	12		
AISCAN-BMPR-1050	"	"	200	60	564	12		
AISCAN-BMPR-1060	"	"	300	60	518	6		
EDITION DATE	EDITION NUMBER	CARD NUMBER						
2017/08	1	EP-BMPR 100						

CHARACTERISTICS ACCORDING TO STANDARD IEC 61537:2006		OBSERVATIONS
DESCRIPTION:	MESH CABLE TRAY HIGH RESISTANCE	FOR THE UNION BETWEEN BRACKETS WILL BE REQUIRED THE USE OF 2 TO 4 SETS OF UNION (CUBS), DEPENDING THE WIDTH OF THE TRAY// OR UNIFAST ACCESORIES.  WITH ALL EDGES ROUNDED.
COATING:	IN ACCORDING TO UNE-EN 12329:2001	
MATERIAL:	METALLIC	
ELECTRICAL CONTINUITY:	YES	
FLAME PROPAGATE:	NO	
OPERATING TEMPERATURE RANGE:	-40 °C / 150 °C	<b>ACCESORIES</b> TRAY ATTACHMENT ASSEMBLY (CUB) UNIFAST UNIVERSAL MESH CABLE TRAY COVER (TUBC) OMEGA BRACKET (SO)
RESISTANCE TO CORROSION:	CLASS 8	
IMPACT RESISTANCE:	20 J TO -40 °C	
ALLOWABLE WORKING LOAD (CTA):	DISTANCE BETWEEN SUPPORTS (1,5 METERS)	

THE INSTALLATION OF THIS PRODUCT WILL BE CARRIED OUT ACCORDING TO THE R.E.B.T.